


Nominal Dimensions: 12" x 11" x 2 3/4"

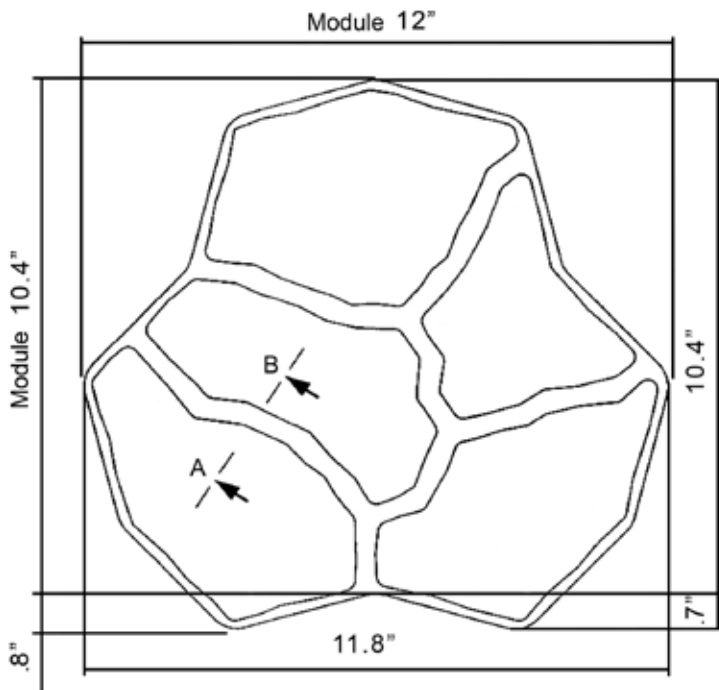

DynaPrint™ pavers meet the following requirements set forth in ASTM C 936, Standard Specification for Interlocking Concrete Paving Units:

- Average compressive strength of 8,000 psi with no individual unit under 7,000 psi.
- Average absorption of 5% with no unit greater than 7% when tested in accordance with ASTM C 140.

* Polymeric sand is recommended for joint stabilization.

PACKAGING INFORMATION

Weight per Unit	- 21 Lbs.
Sq. Ft per Unit	- .64
Units per Pallet	- 96
Sq. Ft. per Pallet	- 61.4
Weight per Pallet	- 1,640 Lbs.

* Call a sales representative for more information on the DynaPrint™ Lifter.

