


# GEOSTONE

## PALLET OVERVIEW

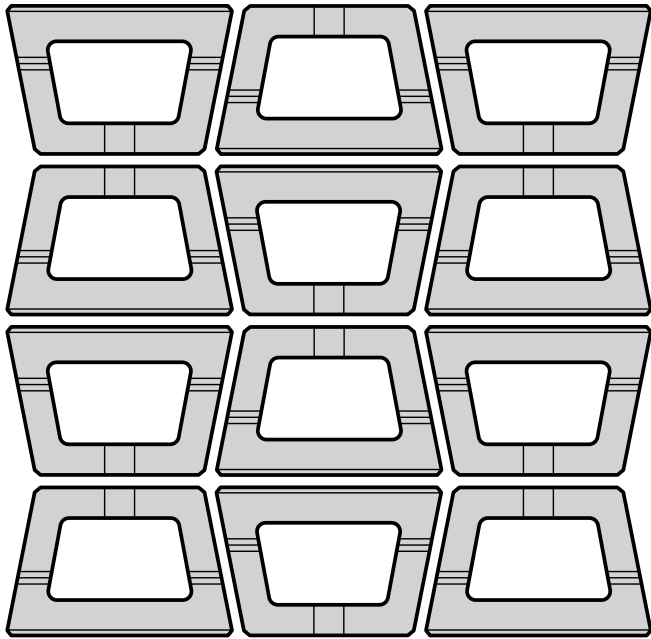

24 units / pallet  
 24 sq. ft. / pallet  
 2 layers / pallet  
 1,920 lbs. / pallet

## SPECIFICATIONS




18" x 12" x 8"  
 80 lbs. / unit  
 1 unit / sq. ft.  
 1/2 cu. ft. / per core  
 4.5' minimum radius

## CORNER DETAILS

A corner takes 1.5 blocks per course to make. The first block is split in half. Take care to make sure this split is made at exactly the halfway point so that the other half can be used on the next course's corner.

On the second block, measure all the way to the point where the inside of the core starts to make its turn. This is where a cut is necessary in order to fit snug against the machined edge of the other piece of the corner. The length of the piece to be cut off should be 3" (the same as the width of the split edge on the half block).



## NOTES



DRY-CAST  
 WARRANTY

## CAP OPTIONS



C CAPS



C-2 CAPS



DOUBLE  
 BULLNOSE CAPS



DIMENSIONAL  
 COPING

## APPLICATIONS



WALLS &  
 COLUMNS

COLOR SWATCHES AVAILABLE AT LAMPUS.COM • ALL WEIGHTS ARE APPROXIMATE.